





PH5012 Product Show

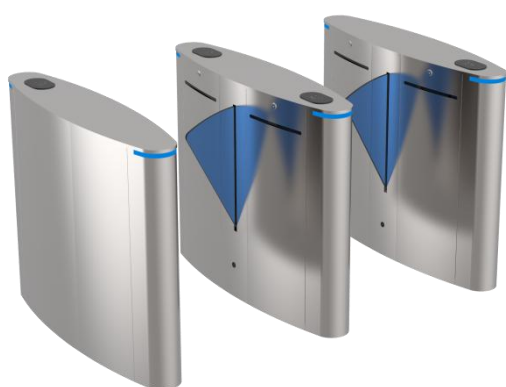

two-chann

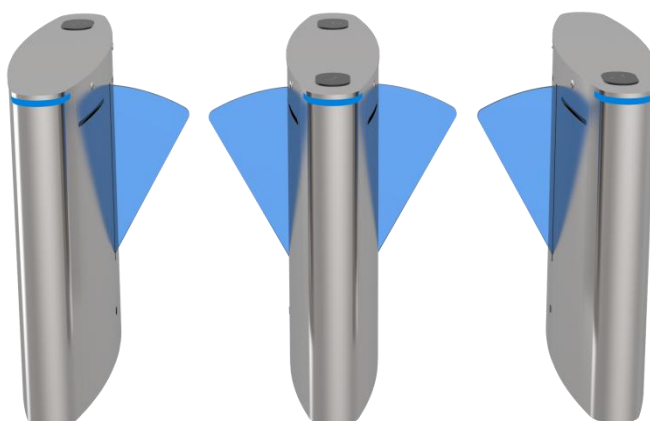


Single channel

Functions & Features

- 1、Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、With functions of anti-tail, anti-reverse pass and so on;
- 3、Card can be set "with memory" or "without memory" functions;
- 4、With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、With infrared anti-clip function (anti-clip when gate is open or running);
- 6、Compatible with IC, ID card, scanning and face recognition,etc.
- 7、Two modes of operation are available: open or closed.
- 8、Various working modes are available, including two-way card reading and one-way card reading,etc.

Product Size

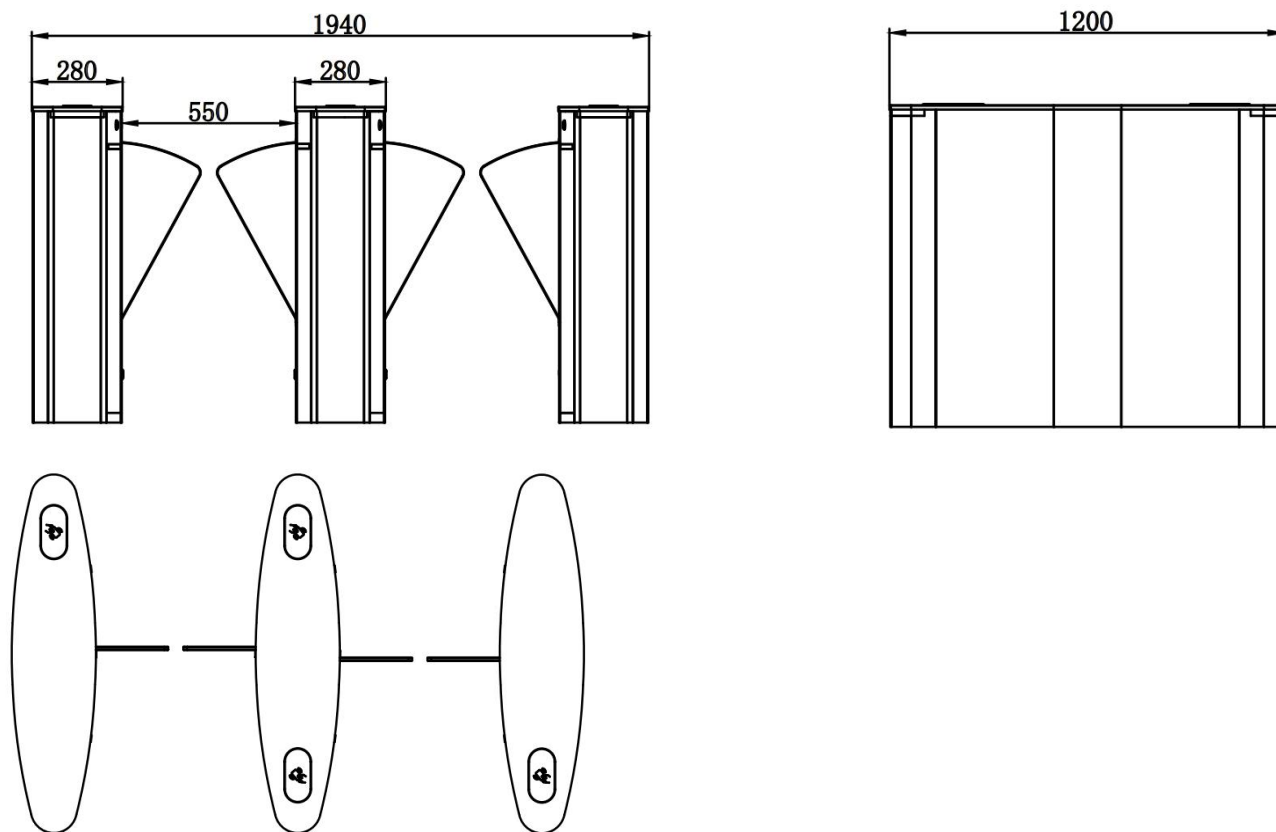

Parameters

Size (L*W*H)	1200*280*980mm
Pass width	550mm
Power	50W
Material	Top δ =2.0mm/ body δ =1.2mm SUS304
Bar Material	Blue PC Arm
Movement	Brushed Flap Barrier Gate movement
Infrared sensor	5 pairs
Sensor	Limited sensor
Indicator Light	RGB light
Drive Unit	Brushed DC Motor 40K 30W
Power Supply	24V 150W
Control Unit	Main board
Communication Interface	Dry contact & RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	$\leq$ 90% No condensation
IP	IP4X
Environment	Indoor and outdoor (outdoor with canopy)

Case share

