



A602 Product Show



two-channel




Single channel

Functions & Features

- 1、 Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、 With functions of anti-tail, anti-reverse pass and so on;
- 3、 Card can be set "with memory" or "without memory" functions;
- 4、 With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、 With infrared anti-clip function (anti-clip when gate is open or running);
- 6、 Compatible with IC, ID card, scanning and face recognition,etc.
- 7、 Two modes of operation are available: open or closed.
- 8、 Various working modes are available, including two-way card reading and one-way card reading,etc.

Product Size

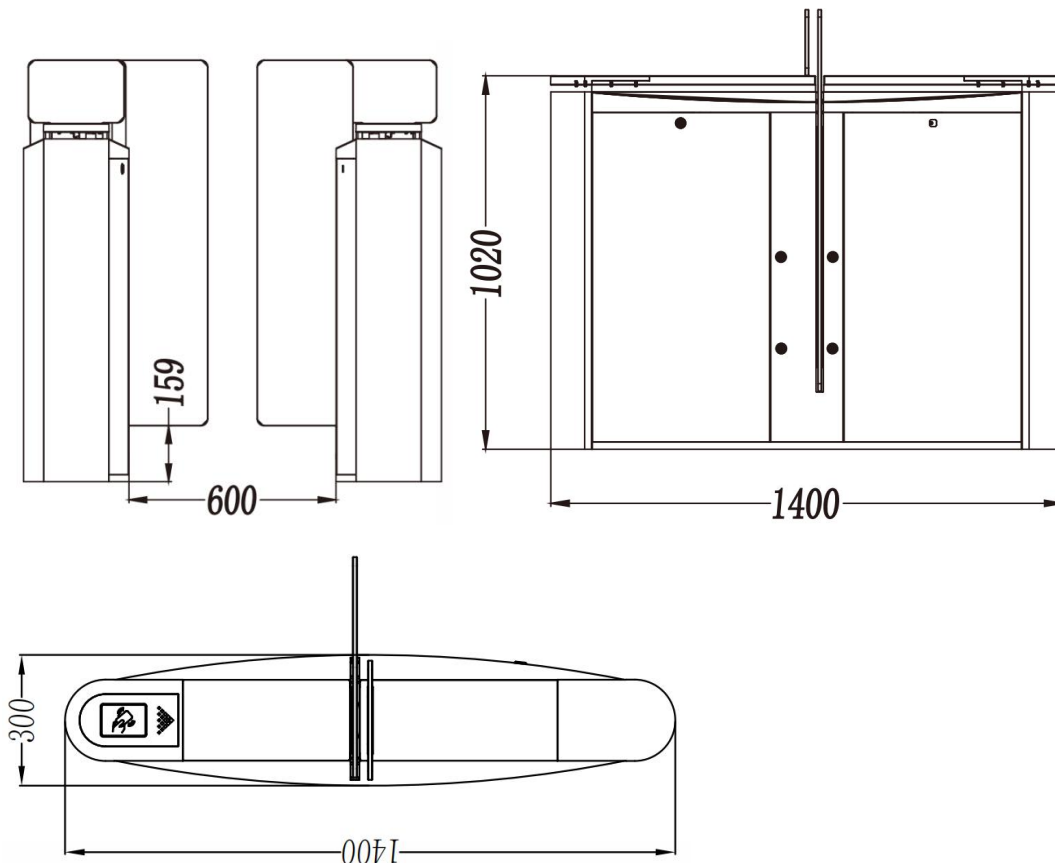

Parameter

Size (L*W*H)	1400*300*1020mm
Pass width	550mm
Power	50W
Material	Top δ =1.5mm/ body δ =1.2mm SUS304
Bar Material	δ =10mm Acrylic Arm+RGB light
Movement	Brushed sliding Gate movement
Infrared sensor	7 pairs
Sensor	Limited sensor
Indicator Light	RGB light
Drive Unit	Brushed DC Motor 10K 30W
Power Supply	24V 150W
Control Unit	Main board
Communication Interface	Dry contact & RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	$\leq$ 90% No condensation
IP	IP4X
Environment	Indoor and outdoor (outdoor with canopy)

Product model: PA902

PSNET

Case share



FOR A SAFER WORLD.